

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Россия +7(495)268-04-70

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37

Казахстан +7(7172)727-132

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Саранск (8342)22-96-24
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97

Киргизия +996(312)96-26-47

Тверь (4822)63-31-35
Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93


www.aptiv.nt-rt.ru | | avi@nt-rt.ru

Технические характеристики на уплотнители без обжима, без уплотнения диска КОМПАНИИ **ARTIV PLC**

Part Number: 35105310

NO CRIMP / DISK SEAL FITS TO 9.8 mm CAVITY


This part is not currently offered in our sample program.

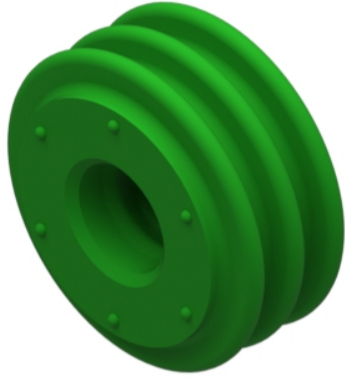

Part Number: 35103087

NO CRIMP / DISK SEAL FITS TO 15.4 mm CAVITY

This part is not currently offered in our sample program.

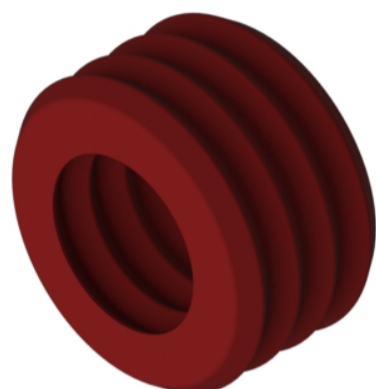

Attributes

Type
NO CRIMP / DISK SEAL

Hardness (Shore)
20

Outer Diameter (mm)
20.9

Contains Lubricant (Oil Content)
Medium

Borehole Diameter (mm)
11.6

Min. operating temperature
-40°C

Length (mm)
12


Max. operating temperature
+140°C

Color
RED-BROWN

Part Number: 35095204

NO CRIMP / DISK SEAL FITS TO 24.0 mm CAVITY

This part is not currently offered in our sample program.

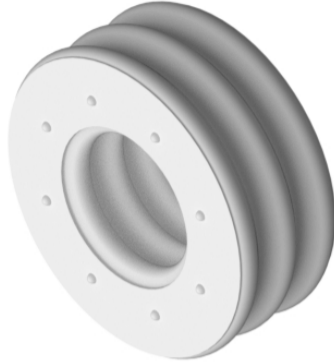

Attributes

Type
NO CRIMP / DISK SEAL

Color
WHITE

Outer Diameter (mm)
25.2

Hardness (Shore)
50

Borehole Diameter (mm)
11

Contains Lubricant (Oil Content)
Low

Length (mm)
10

Min. operating temperature
-40°C

Min Cable Outer Diameter (mm)
11.5

Max. operating temperature
+140°C

Max Cable Outer Diameter (mm)
12.8

Part Number: 35093138

NO CRIMP / DISK SEAL FITS TO 24.0 mm CAVITY



Attributes

Type
NO CRIMP / DISK SEAL

Color
GRAY

Outer Diameter (mm)
25.2

Hardness (Shore)
50

Borehole Diameter (mm)
9.1

Contains Lubricant (Oil Content)
Low

Length (mm)
10

Min. operating temperature
-40°C

Min Cable Outer Diameter (mm)
9.8


Max. operating temperature
+140°C

Max Cable Outer Diameter (mm)
11

Part Number: 35072868

NO CRIMP / DISK SEAL FITS TO 24.0 mm CAVITY

This part is not currently offered in our sample program.

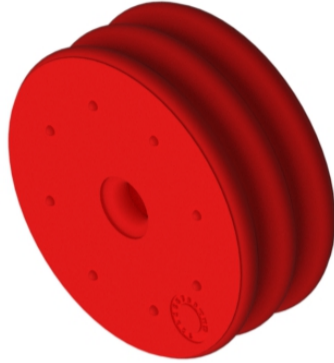

Attributes

Type
NO CRIMP / DISK SEAL

Color
RED

Outer Diameter (mm)
25.2

Hardness (Shore)
50

Borehole Diameter (mm)
2.9

Contains Lubricant (Oil Content)
Low

Length (mm)
10

Min. operating temperature
-40°C

Min Cable Outer Diameter (mm)
3.5


Max. operating temperature
+140°C

Max Cable Outer Diameter (mm)
4.4

Part Number: 35049931

NO CRIMP / DISK SEAL FITS TO 24.0 mm CAVITY

This part is not currently offered in our sample program.

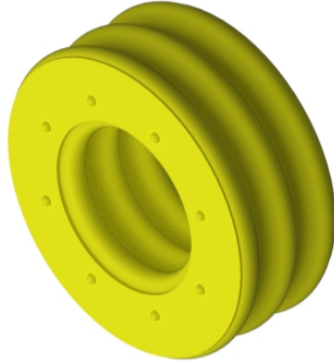

Attributes

Type
NO CRIMP / DISK SEAL

Color
YELLOW

Outer Diameter (mm)
25.2

Hardness (Shore)
50

Borehole Diameter (mm)
11.9

Contains Lubricant (Oil Content)
Low

Length (mm)
10

Min. operating temperature
-40°C

Min Cable Outer Diameter (mm)
12.5


Max. operating temperature
+140°C

Max Cable Outer Diameter (mm)
13.5

Part Number: 33352049

NO CRIMP / DISK SEAL FITS TO 24.0 mm CAVITY

This part is not currently offered in our sample program.

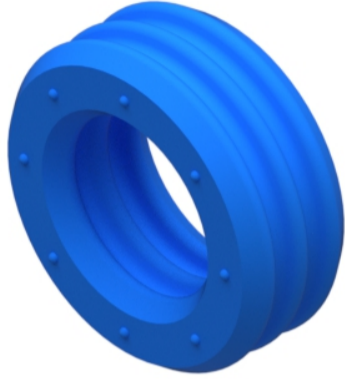

Attributes

Type
NO CRIMP / DISK SEAL

Hardness (Shore)
30

Outer Diameter (mm)
25.26

Contains Lubricant (Oil Content)
Medium

Borehole Diameter (mm)
14

Min. operating temperature
-40°C

Length (mm)
10

Max. operating temperature
+140°C

Color
BLUE

Part Number: 33352048

NO CRIMP / DISK SEAL FITS TO 24.0 mm CAVITY

This part is not currently offered in our sample program.



Attributes

Type
NO CRIMP / DISK SEAL

Hardness (Shore)
30

Outer Diameter (mm)
25.26

Contains Lubricant (Oil Content)
Medium

Borehole Diameter (mm)
12.6

Min. operating temperature
-40°C

Length (mm)
10


Max. operating temperature
+140°C

Color
GRAY

Part Number: 33288396

NO CRIMP / DISK SEAL FITS TO 24.0 mm CAVITY

This part is not currently offered in our sample program.

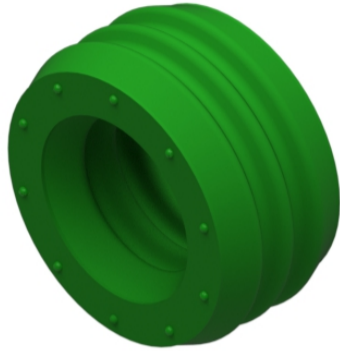


Attributes

Type	Max Cable Outer Diameter (mm)
NO CRIMP / DISK SEAL	14.4
Outer Diameter (mm)	Color
24.1	GREEN
Borehole Diameter (mm)	Min. operating temperature
12.6	-40°C
Length (mm)	Max. operating temperature
12.3	+140°C
Min Cable Outer Diameter (mm)	
13.8	

Part Number: 33126063

NO CRIMP / DISK SEAL FITS TO 20 mm CAVITY

This part is not currently offered in our sample program.



Attributes

Type
NO CRIMP / DISK SEAL

Color
VIOLET

Outer Diameter (mm)
21

Hardness (Shore)
30

Borehole Diameter (mm)
7.8

Contains Lubricant (Oil Content)
Medium

Length (mm)
13.2

Min. operating temperature
-40°C

Min Cable Outer Diameter (mm)
9.2

Max. operating temperature
+140°C

Max Cable Outer Diameter (mm)
10

Part Number: 33119251

NO CRIMP / DISK SEAL FITS TO 20 mm CAVITY

This part is not currently offered in our sample program.



Attributes

Type
NO CRIMP / DISK SEAL

Color
GRAY

Outer Diameter (mm)
21

Hardness (Shore)
30

Borehole Diameter (mm)
8.7

Contains Lubricant (Oil Content)
Medium

Length (mm)
13.2

Min. operating temperature
-40°C

Min Cable Outer Diameter (mm)
10.1



Max. operating temperature
+140°C

Max Cable Outer Diameter (mm)
10.5

Part Number: 33119250

NO CRIMP / DISK SEAL FITS TO 20 mm CAVITY

This part is not currently offered in our sample program.



Attributes

Type
NO CRIMP / DISK SEAL

Color
BROWN

Outer Diameter (mm)
21

Hardness (Shore)
30

Borehole Diameter (mm)
8.9

Contains Lubricant (Oil Content)
Medium

Length (mm)
13.2

Min. operating temperature
-40°C

Min Cable Outer Diameter (mm)
10.1


Max. operating temperature
+140°C

Max Cable Outer Diameter (mm)
10.9

Part Number: 33112616

NO CRIMP / DISK SEAL FITS TO 24.0 mm CAVITY

This part is not currently offered in our sample program.




Attributes

Type	Max Cable Outer Diameter (mm)
NO CRIMP / DISK SEAL	15.8
Outer Diameter (mm)	Color
24.1	ORANGE
Borehole Diameter (mm)	Min. operating temperature
14	-40°C
Length (mm)	Max. operating temperature
12.3	+140°C
Min Cable Outer Diameter (mm)	
15.2	

Part Number: 15548046

NO CRIMP / DISK SEAL FITS TO 20 mm CAVITY

This part is not currently offered in our sample program.

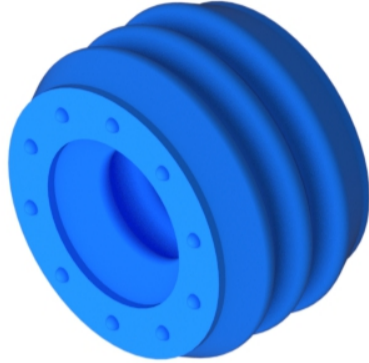

Attributes

Type
NO CRIMP / DISK SEAL

Color
BLUE

Outer Diameter (mm)
21

Hardness (Shore)
30

Borehole Diameter (mm)
7.67

Contains Lubricant (Oil Content)
Medium

Length (mm)
13.2

Min. operating temperature
-40°C

Min Cable Outer Diameter (mm)
8.89


Max. operating temperature
+140°C

Max Cable Outer Diameter (mm)
9.65

Part Number: 15548042

NO CRIMP / DISK SEAL FITS TO 20 mm CAVITY

This part is not currently offered in our sample program.



Attributes

Type
NO CRIMP / DISK SEAL

Color
GREEN

Outer Diameter (mm)
21

Hardness (Shore)
30

Borehole Diameter (mm)
9.6

Contains Lubricant (Oil Content)
Medium

Length (mm)
13.2

Min. operating temperature
-40°C



Min Cable Outer Diameter (mm)
11.05

Max. operating temperature
+140°C

Max Cable Outer Diameter (mm)
11.35

Part Number: 13675514

NO CRIMP / DISK SEAL FITS TO 15.4 mm CAVITY



Attributes

Type
NO CRIMP / DISK SEAL

Color
RED-BROWN

Outer Diameter (mm)
16.1

Hardness (Shore)
50

Borehole Diameter (mm)
8.4

Contains Lubricant (Oil Content)
Low

Length (mm)
9.05

Min. operating temperature
-40°C

Min Cable Outer Diameter (mm)
9



Max. operating temperature
+140°C

Max Cable Outer Diameter (mm)
10.2

Part Number: 13675513

NO CRIMP / DISK SEAL FITS TO 15.4 mm CAVITY

This part is not currently offered in our sample program.

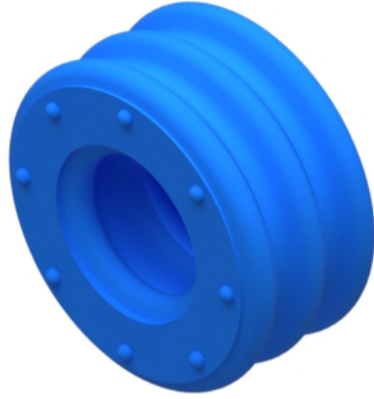

Attributes

Type
NO CRIMP / DISK SEAL

Color
BLUE

Outer Diameter (mm)
16.1

Hardness (Shore)
50

Borehole Diameter (mm)
7

Contains Lubricant (Oil Content)
Low

Length (mm)
9.05

Min. operating temperature
-40°C

Min Cable Outer Diameter (mm)
7.61


Max. operating temperature
+140°C

Max Cable Outer Diameter (mm)
9.19

Part Number: 13675512

NO CRIMP / DISK SEAL FITS TO 15.4 mm CAVITY

This part is not currently offered in our sample program.

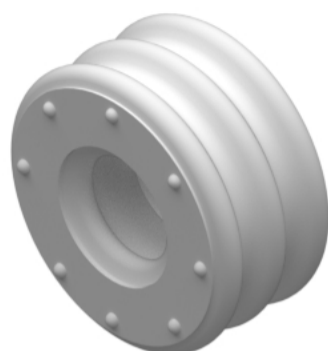

Attributes

Type
NO CRIMP / DISK SEAL

Color
WHITE

Outer Diameter (mm)
16.1

Hardness (Shore)
50

Borehole Diameter (mm)
5.9

Contains Lubricant (Oil Content)
Low

Length (mm)
9.05

Min. operating temperature
-40°C

Min Cable Outer Diameter (mm)
6.63

Max. operating temperature
+140°C

Max Cable Outer Diameter (mm)
7.75

Part Number: 13675511

NO CRIMP / DISK SEAL FITS TO 15.4 mm CAVITY

This part is not currently offered in our sample program.



Attributes

Type
NO CRIMP / DISK SEAL

Color
BLACK

Outer Diameter (mm)
16.4

Hardness (Shore)
50

Borehole Diameter (mm)
4.7

Contains Lubricant (Oil Content)
Low

Length (mm)
9.05

Min. operating temperature
-40°C

Min Cable Outer Diameter (mm)
5.4

Max. operating temperature
+140°C

Max Cable Outer Diameter (mm)
6.6

Part Number: 13675510

NO CRIMP / DISK SEAL FITS TO 15.4 mm CAVITY

This part is not currently offered in our sample program.



Attributes

Type
NO CRIMP / DISK SEAL

Color
GRAY

Outer Diameter (mm)
16.4

Hardness (Shore)
50

Borehole Diameter (mm)
3.8

Contains Lubricant (Oil Content)
Low

Length (mm)
9.05

Min. operating temperature
-40°C

Min Cable Outer Diameter (mm)
4.54

Max. operating temperature
+140°C

Max Cable Outer Diameter (mm)
5.79

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Саранск (8342)22-96-24
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97

Тверь (4822)63-31-35
Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

www.aptiv.nt-rt.ru | | avi@nt-rt.ru